

Technical Data Sheet

WEISS™

FH708


ClearGlow 4 in 1

White Fascia

Dimensions

Cut-out size for outlet vent 155mm

Cut-out size for main body 161mmx364mm

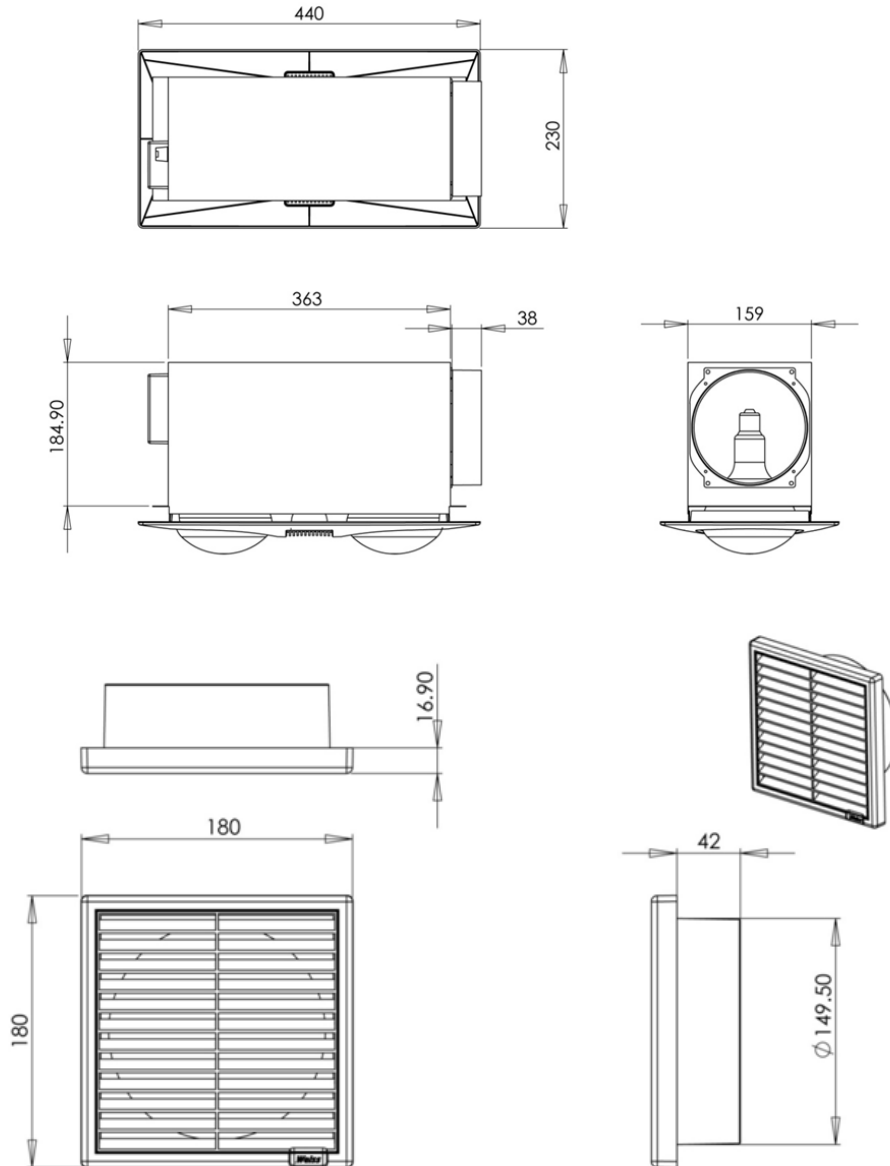

Specifications

Weight	4.6 Kg
Colour of front fascia	White
Housing material	Sheet Steel
Fascia material	Poly Carb

Approval

AS/NZS 3350.2.80:1998 Amdts 1-3 "Electrical Fan"

Features

- Easy to install
- Powerful, yet quiet fan motor due to ceiling cavity installation
- 3 meters of 150mm diameter ducting included
- Unique 'no fuss' all in one unit
- 2 x 275 watt heat globes
- 1 x 50 watt halogen light
- 3 way wall switch
- All parts are included
- 3 year extended warranty

Technical Data Sheet

Product Use

The FH708 is used for the lighting and extraction of mist

Typical applications:

- Bathrooms

Environmental Conditions

Operation	to IEC 721-3-3
Climatic conditions	class 3K5
Temperature	0...+50°C
Humidity	<95% r.h.

Standards

Test standards	AS/NZS 3350.2.80: 1998 Amdts 1-3 "Electrical Fan"
Test Report no	SD4373
EMC Compliance	This is a Level One product with an C frame motor that has a very low risk of causing EMC Interference

General

Powerful inline fan with ducting extracts mist that can cause mould and dampness and expels it outside your home

Free air fan performance	362m ³ /hr 100.6L/sec
Installed Decibel rating	44 DB
Ceiling Insulation clearance	150mm from steel body on all sides, no insulation to cover body

Ordering

When ordering please give name and type,	
Reference	FH708
Barcode	942000490114-0

Technical Data

Power Supply	230 VAC
Power consumption	max. 3 Amps
Supply Line fusing	max. 10A
Connection terminals	screw clamp terminals
For solid wires	2 x 1.5mm ²
Motor	230-240VAC 50Hz 0,4Amp
Motor insulation class	B1
Total motor wattage	40 Watts
Motor protection	Thermally protected